


CONCEALED HINGE (INSET)



230-U26/OT

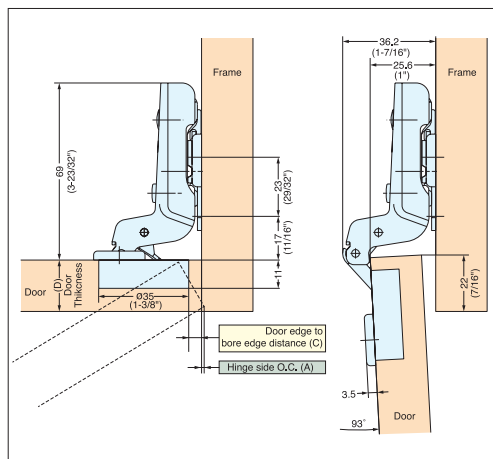


■ Hinge side opening clearance chart


Door thickness (D)	Door edge to bore edge distance (C)		
	3	4	5
15	0.0	0.0	0.0
16	0.1	0.1	0.1
17	0.1	0.1	0.1
18	0.3	0.3	0.2
19	0.4	0.4	0.4
20	0.6	0.6	0.6
21	0.9	0.8	0.8
22	1.2	1.2	1.1
Hinge side O.C. (A)			

*Mounting Plate sold separately. See P.301

*Mounting Screw sold separately. See TAP3515NI on P.301



Bore Dimensions




- Spring loaded concealed hinge pushes doors open.
- Use with a push latch (MC-37, MC-28, etc) to create a "Push to Open" handsfree self opening door. See P.123-124

Item No.	Type	Weight (g)	Carton (pcs)	Material	Finish
230-U26/OT	Self-Opening	60	200	Steel	Nickel

MOUNTING PLATE FOR 230 SERIES HINGES







230-P4W-32T



230-P4W-32T + 2




230-P4W-32T + 5



Installation



Face Frame Bracket for 230 Mounting Plate.
See P.344 (Sold separately)



TAP3515 NI
(Sold separately)

Item No.	Weight (g)	Carton (pcs)
230-P4W-32T	40	400
230-P4W-32T + 2		
230-P4W-32T + 5		

Material	Finish
Steel	Nickel